



SYDNEY TIMBER SUPPLY

Blackbutt Decking

Eucalyptus pilularis, Australian hardwood · Kiln dried



DURABILITY

Class 1 above ground, 40+ years

HARDNESS

Janka 8.9 (Hard)

DENSITY

990 to 1100 kg/m³

BAL RATING

BAL 29 (AS 3959-2009)

SIZES

86 × 19, 135 × 21 mm

SOLD

Per linear metre, random lengths

SUPPORTED APPLICATIONS

Decking, screening and general outdoor work where an even, lighter-toned Australian hardwood is wanted.

An Australian-grown hardwood species, milled by our supplier. Species origin and durability are stated as published in the supplier specification sheets held on file by Sydney Timber Supply.



01 Technical information

Condition	Kiln Dried
Botanical name	Eucalyptus pilularis
Tone	Creamy blonde to rich honey tones with a hint of pink
Texture	Straight grain and even texture
Natural durability	Class 1 High (above ground), 40+ years (supplier published)
Strength group	SD2 seasoned (High)
Hardness	Janka 8.9 (Hard)
Density	990 to 1100 kg/m ³
BAL rating (AS 3959-2009)	BAL 29
Termites	Resistant
Grade	Stagwood Organic (balanced natural selection of the tree)
Nominal sizes	86 × 19 mm and 135 × 21 mm decking
Selling unit	Per linear metre (LM), random lengths; preferred lengths by quote



02 Product overview

Blackbutt is a highly durable, straight grained and even textured Australian hardwood whose grain and colour palette is a favourite of architects, designers and owners alike. The supplier specification sheet publishes Class 1 above-ground durability with a 40+ year service expectation and a BAL 29 bushfire rating under AS 3959-2009.

Its consistent texture takes oils and finishes well, and its creamy blonde to honey tones suit modern and traditional homes alike.



03 Profile and dimensions

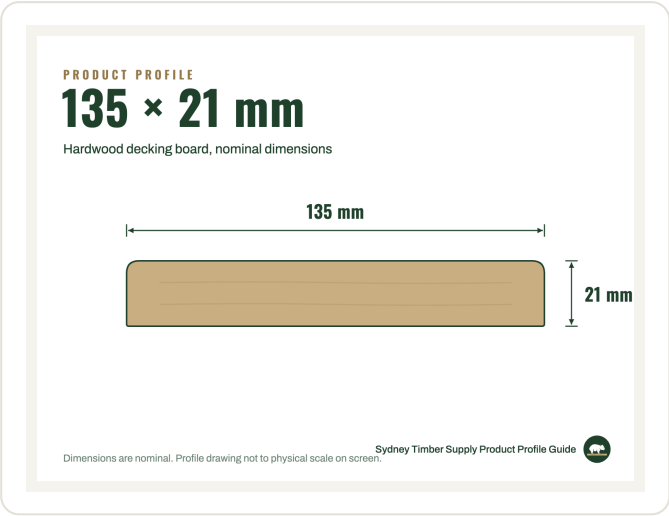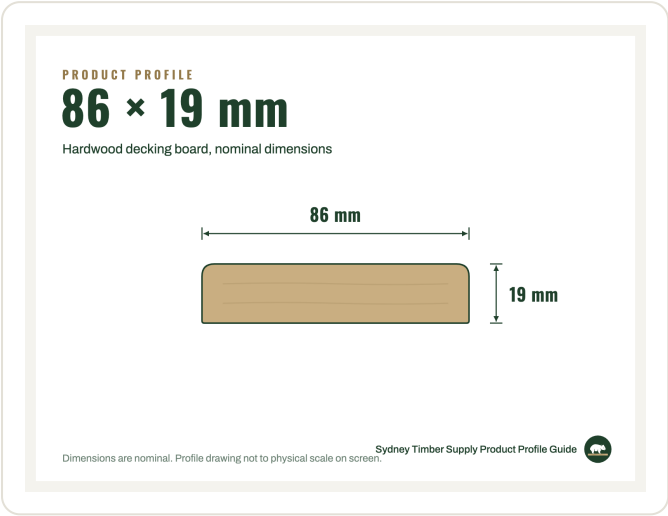

04 Ordering

Pricing	Priced per linear metre (LM). The current rate is shown on the product page; quantities are entered as linear metres.
Lengths	Random lengths are supplied. Preferred individual lengths can be requested by quote and are confirmed against current supplier availability.
Packs and trade	Pack quantities, set-length packs where published, and trade volumes are quoted. Use the quote form on the product page or call us.
Pickup and delivery	Pickup from West Gosford NSW. Delivery is quoted per order based on load size, board length and site access.



05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- Fix with hot dipped galvanised or stainless steel screws, two per joist, pre-drilled and countersunk. Stainless steel fixings are recommended for coastal or poolside work.
- Maintain ventilation gaps between boards and adequate ground clearance so the deck can dry out; the supplier installation guidelines on the product page set out clearances in detail.
- Use sharp, quality cutting tools and seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

07 Source and disclaimer

Technical information has been compiled from Stagwood supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.