



SYDNEY TIMBER SUPPLY

Treated Pine Framing

H-treated structural pine, MGP10



GRADE

MGP10 structural

TREATMENT

H3 LOSP (structural); level confirmed per batch

STANDARDS

AS/NZS 1604

ORIGIN

Plantation grown,
responsibly sourced

SIZES

90 × 45, 140 × 45 mm

SOLD

Per board, set lengths

SUPPORTED APPLICATIONS

Bearers, joists, exterior above-ground framing and general structural work per the treatment level supplied.

An Australian-grown hardwood species, milled by our supplier. Species origin and durability are stated as published in the supplier specification sheets held on file by Sydney Timber Supply.



01 Technical information

Species	Plantation pine
Grade	MGP10 (machine graded structural pine); supplier publishes MGP10/MGP12 for structural treated pine
Treatment	Structural treated pine is published as H3 LOSP to AS/NZS 1604; the treatment level of the specific batch supplied is confirmed at quote and on delivery paperwork
H3 scope	H3 protects against termites, rot and decay in above-ground outdoor use; it is not rated for in-ground contact
Sourcing	Responsibly sourced from sustainably grown plantation timbers (supplier statement)
Nominal sizes	90 × 45 mm and 140 × 45 mm framing
Selling unit	Per board in set lengths; the price for each length derives from a single per-metre rate



02 Product overview

Treated pine framing covers structural work that needs decay and insect protection: framing near slab level, bottom plates, and exterior above-ground structural sections, depending on the treatment level of the batch supplied.

Supply at these sizes is machine graded MGP10, the standard structural stress grade for house framing in Australia. Treatment levels are stated per product and confirmed on quote and delivery paperwork rather than assumed from the product name.



03 Profile and dimensions

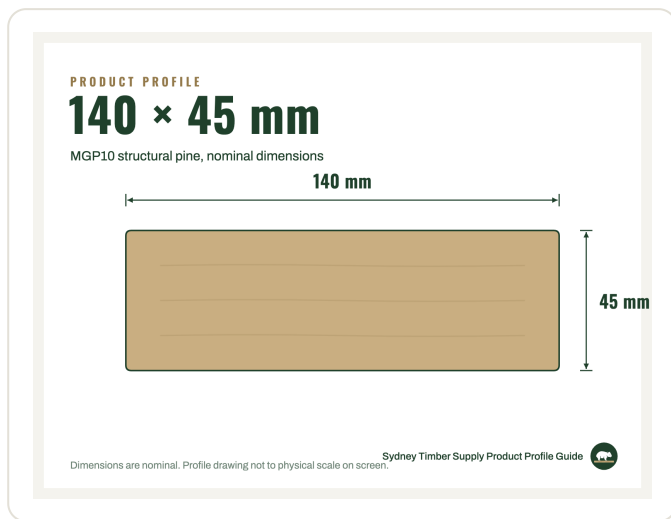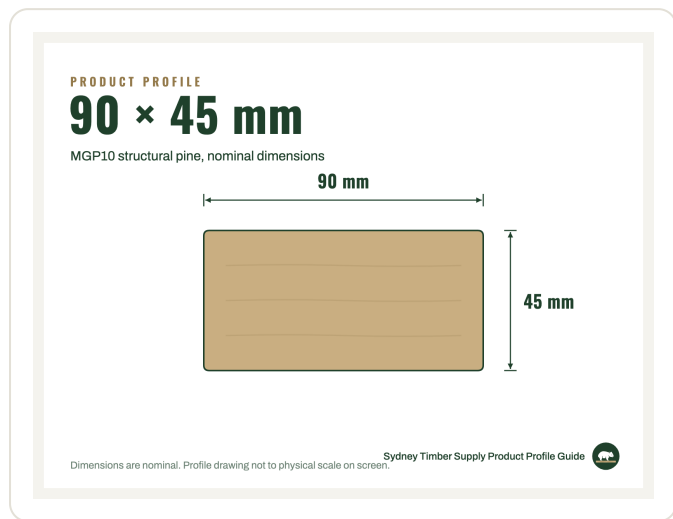

04 Ordering

Pricing	Priced per board in the set lengths shown on the product page. Each length is priced from the same per-metre rate.
Lengths	Supplied in set board lengths. Lengths not listed on the product page can be requested by quote.
Packs and trade	Pack and bulk quantities are quoted against current supplier availability.
Pickup and delivery	Pickup from West Gosford NSW. Delivery is quoted per order based on load size, board length and site access.



05 Installation and handling

- Store framing flat, fully supported and dry before use.
- Machine graded structural pine is used in accordance with the relevant framing standards and project engineering; fix per standard framing practice.

06 Care and maintenance

- Store framing flat, fully supported and dry before and during use.
- Treated pine at these sizes is published as H3 (above-ground exterior); confirm the batch treatment level on your delivery paperwork and confirm suitability before any in-ground or high-exposure use.

07 Source and disclaimer

Technical information has been compiled from supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.