



SYDNEY TIMBER SUPPLY

Gympie Messmate Decking

QLD Blondes, Australian hardwood · Kiln dried



DURABILITY

Class 1 above ground, 40+ years

HARDNESS

Janka 12 (Hard)

DENSITY

955 kg/m³

ORIGIN

Australian hardwood species (supplier-published)

SIZES

86 × 19, 135 × 19 mm

SOLD

Per linear metre, random lengths

SUPPORTED APPLICATIONS

Decking, screening, step treads and dual decking and flooring use.

An Australian-grown hardwood species, milled by our supplier. Species origin and durability are stated as published in the supplier specification sheets held on file by Sydney Timber Supply.



01 Technical information

Condition	Kiln Dried
Botanical name	Eucalyptus cloeziana
Tone	Yellowish-brown; pale straw to golden brown on the deck
Texture	Medium, interlocking grain
Natural durability	Class 1 High (above ground), 40+ years (supplier published)
Hardness	Janka 12 (Hard)
Density	955 kg/m ³
BAL rating (AS 3959-2009)	BAL 12.5 to 19
Termites	Resistant
Grade	Stagwood Organic (balanced natural selection of the tree)
Nominal sizes	86 × 19 mm and 135 × 19 mm decking
Selling unit	Per linear metre (LM), random lengths; preferred lengths by quote



02 Product overview

Gympie Messmate is an Australian hardwood species sold in the market as part of the QLD Blondes group. The supplier specification sheet publishes Class 1 above-ground durability with a 40+ year service expectation, an unusually strong durability profile for a lighter-toned hardwood.

It has a smaller footprint in Sydney retail than Spotted Gum or Merbau, so it is typically sourced closer to order; grade and surface finish are confirmed at quote stage.



03 Profile and dimensions

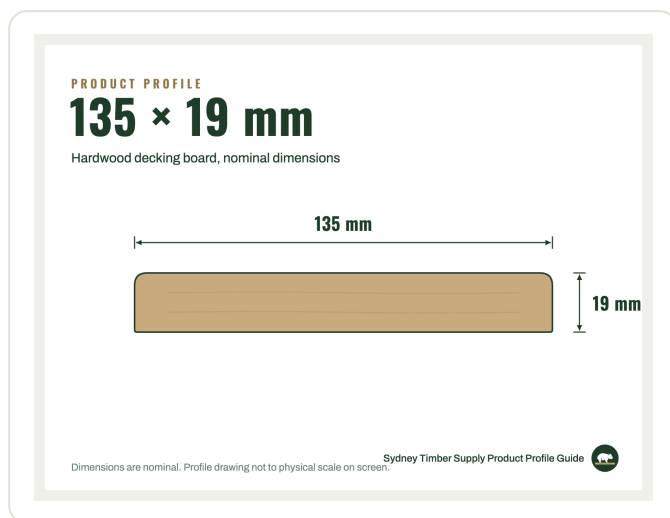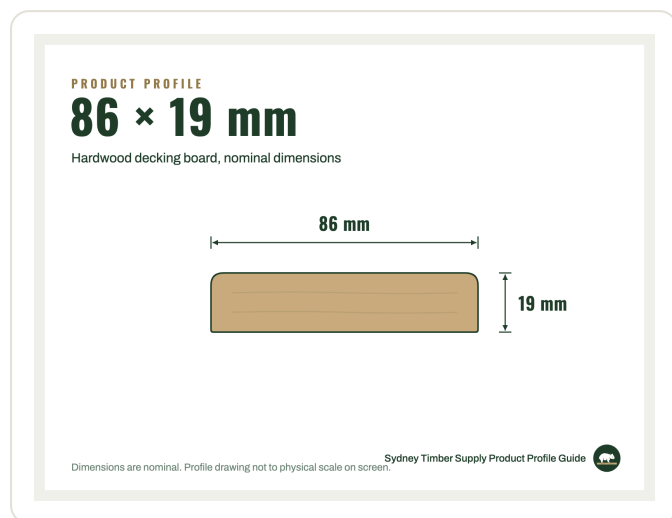

04 Ordering

Pricing	Priced per linear metre (LM). The current rate is shown on the product page; quantities are entered as linear metres.
Lengths	Random lengths are supplied. Preferred individual lengths can be requested by quote and are confirmed against current supplier availability.
Packs and trade	Pack quantities, set-length packs where published, and trade volumes are quoted. Use the quote form on the product page or call us.
Pickup and delivery	Pickup from West Gosford NSW. Delivery is quoted per order based on load size, board length and site access.



05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- Fix with hot dipped galvanised or stainless steel screws, two per joist, pre-drilled and countersunk. Stainless steel fixings are recommended for coastal or poolside work.
- Maintain ventilation gaps between boards and adequate ground clearance so the deck can dry out; the supplier installation guidelines on the product page set out clearances in detail.
- Use sharp, quality cutting tools and seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

07 Source and disclaimer

Technical information has been compiled from Stagwood supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.