



SYDNEY TIMBER SUPPLY

Jambu Mixed Decking

Standard grade Jambu hardwood decking · Kiln dried



DURABILITY

Class 2 above ground

GRADE

Standard

HARDNESS

Janka 1,253 kgf at 12% MC

DENSITY

685 to 990 kg/m³

SIZE

90 × 19 mm

SOLD

By quote, per linear metre

SUPPORTED APPLICATIONS

Decking, fencing, screening and gates.

This species is imported and sits outside our Australian hardwood range. We state that plainly rather than implying an Australian origin. Its durability is stated exactly as published by our supplier.



01 Technical information

Condition	Kiln Dried
Grade	Standard
Colour	Dark grey-brown to medium brown, sometimes with a pinkish hue, with natural board-to-board variation
Sapwood	Straw to pale brown
Texture	Medium to coarse
Grain	Straight to slightly interlocked
Natural durability	Class 2 (above ground) (supplier published)
Strength group	B (Burgess classification) / SG2 (MS 544: Part 2: 2001)
Hardness	Janka 1,253 kgf (at 12% moisture content)
Density	685 to 990 kg/m ³
Shrinkage	Tangential 2.6%, radial 1.6%
Termites	Durable heartwood is resistant
Ventilation note	Supplier guidance: 90 × 19 mm decking requires a minimum 4.5 mm gap between boards
Nominal size	90 × 19 mm decking
Selling unit	Per linear metre (LM), by quote

02 Product overview

Jambu Mixed is the standard grade Jambu decking line, with the same strong, stable hardwood character and a wider natural colour variation from board to board. The supplier publishes Class 2 above-ground natural durability with durable, termite-resistant heartwood.

It suits decking, fencing, gates and general outdoor work where a practical hardwood at a sharper price point is wanted. It is not part of our Australian hardwood range and never carries our Class 1 badge.




03 Profile and dimensions

PRODUCT PROFILE

90 × 19 mm

Hardwood decking board, nominal dimensions

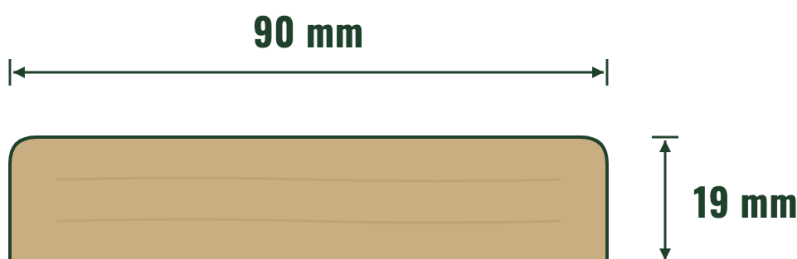

Dimensions are nominal. Profile drawing not to physical scale on screen.

Sydney Timber Supply Product Profile Guide



04 Ordering

Pricing

Supplied by quote. Tell us your quantity and preferred lengths and we will price them against current supplier availability.

Lengths

Random lengths are standard. Preferred individual lengths can be requested in your quote.

Packs and trade

Pack and trade volumes are quoted directly. Use the quote form on the product page or call us.

Pickup and delivery

Pickup from West Gosford NSW. Delivery is quoted per order based on load size, board length and site access.



05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- Fix with hot dipped galvanised or stainless steel screws, two per joist, pre-drilled and countersunk. Stainless steel fixings are recommended for coastal or poolside work.
- Maintain ventilation gaps between boards and adequate ground clearance so the deck can dry out; the supplier installation guidelines on the product page set out clearances in detail.
- Use sharp, quality cutting tools and seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

07 Source and disclaimer

Technical information has been compiled from Stagwood supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.