SYDNEY TIMBER SUPPLY

# Jambu Mixed Decking

Standard grade Jambu hardwood decking · Kiln dried



| DURABILITY | GRADE | HARDNESS |
|---|---|---|
| Class 2 above ground | Standard | Janka 1,253 kgf at 12% MC |

| DENSITY | SIZE | SOLD |
|---|---|---|
| 685 to 990 kg/m³ | 90 × 19 mm | Per linear metre |

**SUPPORTED APPLICATIONS**

Decking, fencing, screening and gates.

Jambu Mixed hardwood decking, standard grade. Its durability is stated exactly as published by our supplier.

## 01 Technical information

| | |
|---|---|
| **Condition** | Kiln Dried |
| **Grade** | Standard |
| **Colour** | Dark grey-brown to medium brown, sometimes with a pinkish hue, with natural board-to-board variation |
| **Sapwood** | Straw to pale brown |
| **Texture** | Medium to coarse |
| **Grain** | Straight to slightly interlocked |
| **Natural durability** | Class 2 (above ground) (supplier published) |
| **Strength group** | B (Burgess classification) / SG2 (MS 544: Part 2: 2001) |
| **Hardness** | Janka 1,253 kgf (at 12% moisture content) |
| **Density** | 685 to 990 kg/m³ |
| **Shrinkage** | Tangential 2.6%, radial 1.6% |
| **Termites** | Durable heartwood is resistant |
| **Ventilation note** | Supplier guidance: 90 × 19 mm decking requires a minimum 4.5 mm gap between boards |
| **Nominal size** | 90 × 19 mm decking |
| **Selling unit** | Per linear metre (LM), random lengths; preferred lengths by quote |

## 02 Product overview

Jambu Mixed is the standard grade Jambu decking line, with the same strong, stable hardwood character and a wider natural colour variation from board to board. The supplier publishes Class 2 above-ground natural durability with durable, termite-resistant heartwood.


Our supplier describes Jambu as suitable for decking, fencing, gates and other outdoor applications.

## 03 Profile and dimensions

PRODUCT PROFILE

**90 × 19 mm**

Hardwood decking board, nominal dimensions

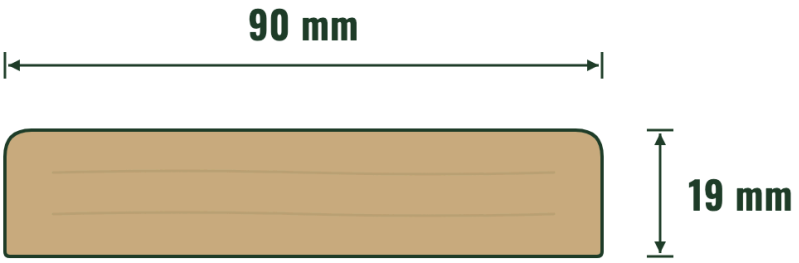


Sydney Timber Supply Product Profile Guide

Dimensions are nominal. Profile drawing not to physical scale on screen.

## 04 Ordering

| | |
|---|---|
| **Pricing** | Priced per linear metre (LM). The current rate is shown on the product page; quantities are entered as linear metres. |
| **Lengths** | Random lengths are supplied. Preferred individual lengths can be requested by quote and are confirmed against current supplier availability. |
| **Packs and trade** | Pack quantities and trade volumes are quoted. Use the quote form on the product page or call us. |
| **Collection and delivery** | Free collection from West Gosford NSW by prior arrangement. Delivery is quoted per order based on load size, board length and site access. |

## 05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- Our supplier's installation guide for Jambu Mixed decking specifies a maximum joist spacing of 450 mm centres and a minimum ground clearance of 400 mm. Additional side and top ventilation is required where clearance is less than 400 mm, or where the sub-floor lacks drainage or cross-flow ventilation.
- The same guide specifies a minimum 4.5 mm gap between boards for 90 × 19 mm decking, a minimum 7 mm from any side or end to fixed structures, and a minimum 12 mm from the side edge and from the end for fixings.
- Fix with hot dipped galvanised or stainless steel screws, two per joist, pre-drilled and countersunk. Stainless steel fixings are recommended for coastal or poolside work.
- Our supplier recommends tungsten carbide tipped cutting tools and quality drill bits. Seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

## 06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

## 07 Source and disclaimer

Technical information has been compiled from Stagwood supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.