

SYDNEY TIMBER SUPPLY

# Merbau Decking

Hardwood decking · Kiln dried

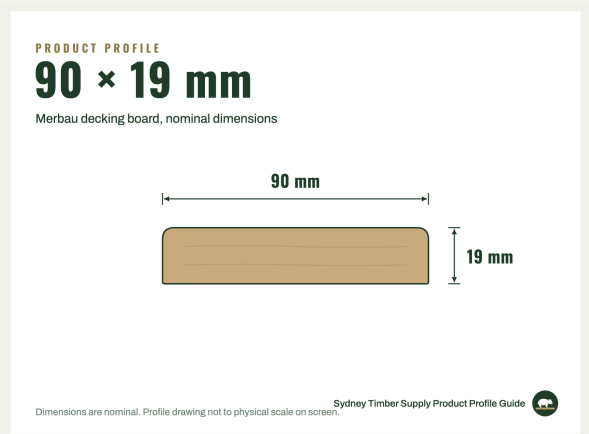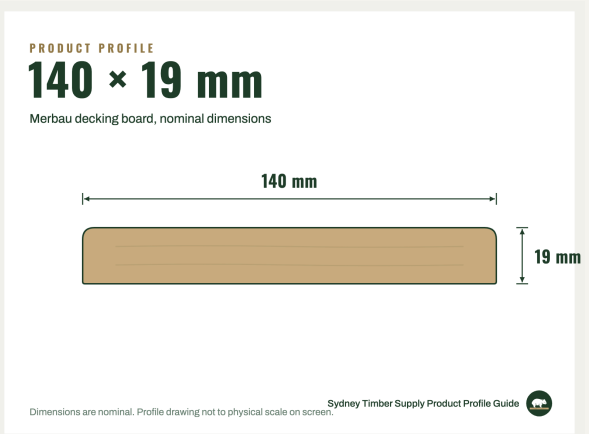


**DURABILITY**
Class 2 (supplier listed)

**SPECIES**
Merbau

**BOARD LENGTHS**
1800 to 5700 mm random

**SET LENGTHS**
Published in 90 × 19 and 140 × 19

**SIZES**
90 × 19, 140 × 19 mm

**SOLD**
Per linear metre

**SUPPORTED APPLICATIONS**

Residential decking runs, steps and general outdoor decking work.

Merbau hardwood decking, sold per linear metre. Its durability is stated exactly as published by our supplier.

## 01 Technical information


| | |
|---|---|
| **Condition** | Kiln Dried |
| **Species** | Merbau |
| **Natural durability** | Class 2 (supplier listed for Merbau decking) |
| **Colour** | Warm orange-brown when freshly milled, maturing to a deeper reddish brown |
| **Board lengths** | 1800 to 5700 mm random lengths; set lengths available in 90 × 19 and 140 × 19 |
| **Tannin note** | Merbau can release tannins in its first months in service; manage runoff near light-coloured paving or render |
| **Nominal sizes** | 90 × 19 mm and 140 × 19 mm decking |
| **Selling unit** | Per linear metre (LM), random lengths; preferred lengths by quote |


## 02 Product overview

Merbau decking as listed by our supplier: Class 2 durability, board lengths of 1800 to 5700 mm supplied as random lengths, and set lengths published for 90 × 19 and 140 × 19 mm. We list the 90 × 19 and 140 × 19 mm boards.

A photograph of the supplied Merbau board stock is not yet available from our supplier's published materials; the profile drawings below show the exact supplied dimensions.

## 03 Profile and dimensions

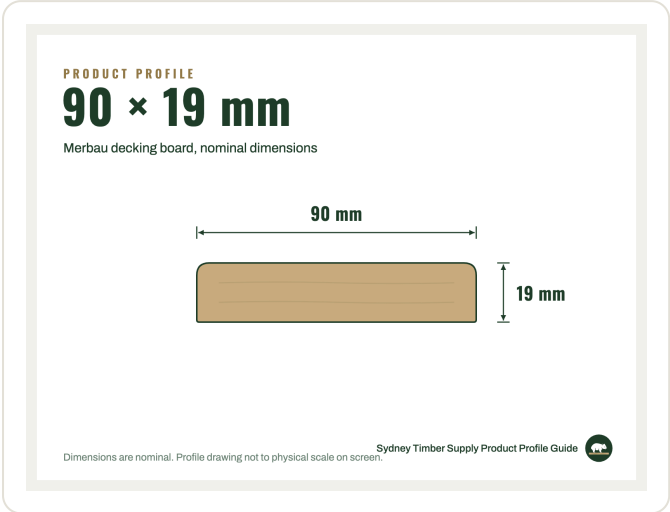

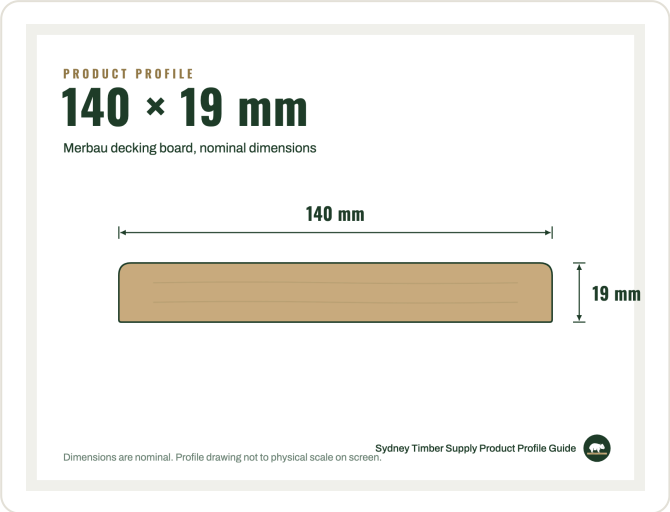
## 04 Ordering

**Pricing**
Priced per linear metre (LM). The current rate is shown on the product page; quantities are entered as linear metres.

**Lengths**
Random lengths are supplied. Preferred individual lengths can be requested by quote and are confirmed against current supplier availability.

**Packs and trade**
Pack quantities and trade volumes are quoted. Use the quote form on the product page or call us.

**Collection and delivery**
Free collection from West Gosford NSW by prior arrangement. Delivery is quoted per order based on load size, board length and site access.

## 05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- We do not hold a supplier installation guide for this Merbau decking. Take board gaps, joist spacing, ground clearance, fixings and fixing distances from the installation instructions supplied with your boards or from your installer.
- Use sharp, quality cutting tools and seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

## 06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

## 07 Source and disclaimer

Technical information has been compiled from supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.