




SYDNEY TIMBER SUPPLY

140 × 19 Peninsula Blonde Decking

Imported hardwood decking, Feature Grade · Kiln dried

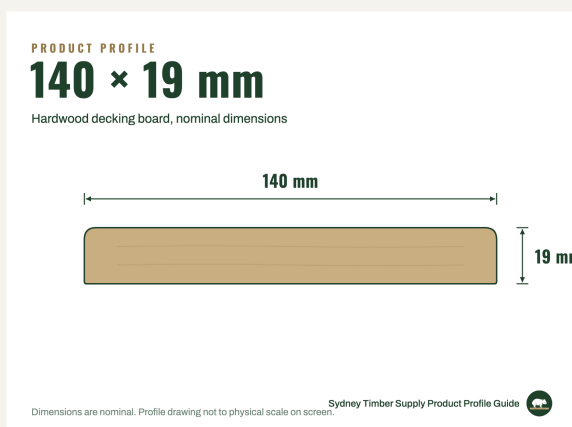

DURABILITY

Class 2 above ground

GRADE

Feature Grade (our classification)

DENSITY

680 to 1130 kg/m³

ORIGIN

Imported from Indonesia

SIZE

140 × 19 mm

SOLD

Per linear metre (LM)

SUPPORTED APPLICATIONS

Decking, fencing and gates.

This timber is imported from Indonesia and is sold under the commercial name Peninsula Blonde, known in the trade as Indonesian Blonde. Its durability, density and shrinkage figures are stated exactly as published by our supplier.



01 Technical information

Condition	Kiln Dried
Grade	Feature Grade: our own commercial classification, not a supplier grade
Also known as	Indonesian Blonde (trade name, not a botanical name). Some supplier documentation titles this range Peninsula Mixed Blondes.
Origin	Imported from Indonesia
Colour	Honey, yellow through to dark brown, darkening with exposure (supplier published)
Sapwood	Yellow; does not darken appreciably (supplier published)
Texture	Fine and even (supplier published)
Grain	Slightly interlocked (supplier published)
Natural durability	Class 2 (above ground) (supplier published)
Strength group	SD1 seasoned (supplier published)
Density	680 to 1130 kg/m ³ (supplier published)
Shrinkage	Tangential approximately 6%, radial approximately 3% (supplier published)
Slip resistance	None in the pre-oiled condition; apply a slip resistant finish where required (supplier published)
Lengths	Random lengths

02 Product overview

Peninsula Blonde is an imported hardwood decking board supplied to us from Indonesia and known in the trade as Indonesian Blonde. Our supplier publishes its colour as honey, running from yellow through to darker brown and darkening with exposure, over a fine, even texture and a slightly interlocked grain.

We classify this line as Feature Grade. That is our own commercial classification of the material we supply, not a grade published by our supplier, and it should not be read as one. Colour and tone vary from board to board, and a single pack can contain broad variation across the boards in it. That is a normal characteristic of this material rather than a fault, and it is worth allowing for when you set out a deck.

We do not publish a botanical species for this product, and we make no claim either way about whether it is one timber or a blend of timbers. Boards are supplied in random lengths and ordered by total linear metres; preferred individual lengths can be requested by quote.




03 Profile and dimensions

PRODUCT PROFILE

140 × 19 mm

Hardwood decking board, nominal dimensions

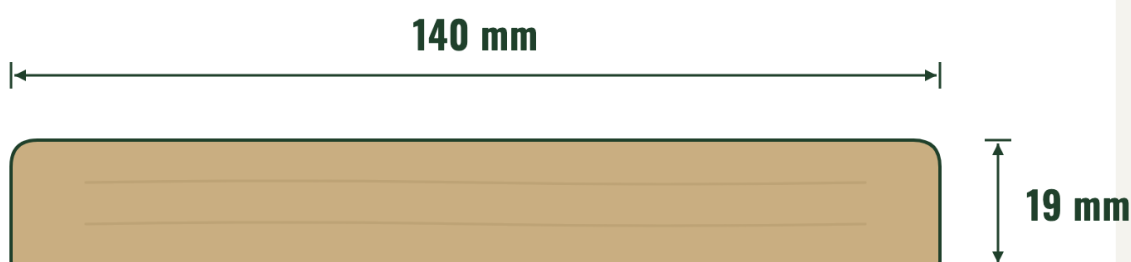

Dimensions are nominal. Profile drawing not to physical scale on screen.

Sydney Timber Supply Product Profile Guide



04 Ordering

Pricing	Priced per linear metre (LM). The current rate is shown on the product page; quantities are entered as linear metres.
Lengths	Random lengths are supplied. Preferred individual lengths can be requested by quote and are confirmed against current supplier availability.
Packs and trade	Pack quantities, set-length packs where published, and trade volumes are quoted. Use the quote form on the product page or call us.
Pickup and delivery	Pickup from West Gosford NSW. Delivery is quoted per order based on load size, board length and site access.



05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- Our supplier specifies a maximum joist spacing of 450 mm centres and a minimum ground clearance of 400 mm. Additional side and top ventilation is required where clearance is less than 400 mm, or where the sub-floor lacks drainage or cross-flow ventilation.
- Our supplier specifies a minimum 7 mm gap between boards for 140 × 19 mm decking, a minimum 7 mm from any side or end to fixed structures, and a minimum 12 mm from the side edge and from the end for fixings.
- Fix with hot dipped galvanised or stainless steel screws, two per joist, pre-drilled and countersunk. Stainless steel fixings are recommended for coastal or poolside work.
- Our supplier recommends tungsten carbide tipped cutting tools and quality drill bits. Seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

07 Source and disclaimer

Technical information has been compiled from supplier product documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.