




SYDNEY TIMBER SUPPLY

Redgum Decking

Forest Red Gum (QLD Reds), Australian hardwood · Kiln dried

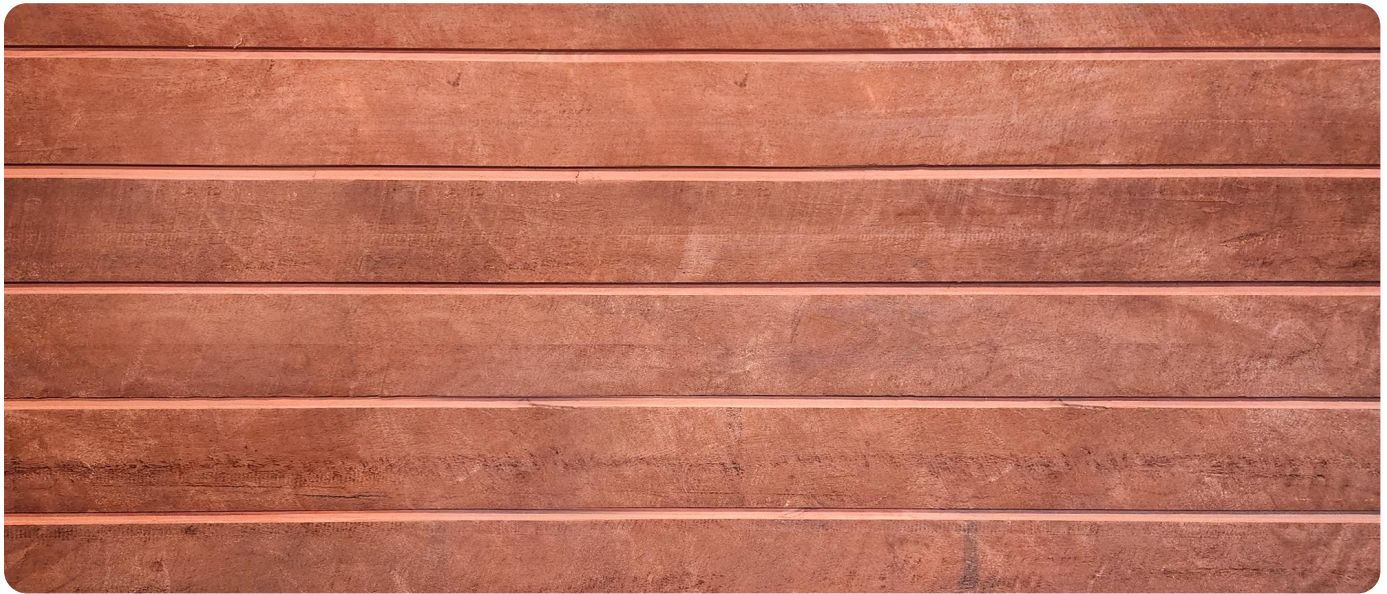

DURABILITY

Class 1 above ground, 40+ years

HARDNESS

Janka 11.3 (Very Hard)

DENSITY

1000 to 1170 kg/m³

ORIGIN

Australian hardwood species (supplier-published)

SIZES

86 × 19, 135 × 19, 135 × 35, 140 × 35 mm

SOLD

Per linear metre, random lengths

SUPPORTED APPLICATIONS

Decking, screening, step treads and architectural finishes inside and out.

An Australian-grown hardwood species, milled by our supplier. Species origin and durability are stated as published in the supplier specification sheets held on file by Sydney Timber Supply.



01 Technical information

Condition	Kiln Dried
Botanical name	Eucalyptus tereticornis (Forest Red Gum, also sold as QLD Blue Gum)
Tone	Soft cherry tones to deep rich burgundy
Natural durability	Class 1 High (above ground), 40+ years (supplier published)
Strength group	SD4 seasoned (Medium High)
Hardness	Janka 11.3 (Very Hard)
Density	1000 to 1170 kg/m ³
BAL rating (AS 3959-2009)	BAL 12.5 to 19
Termites	Resistant
Profile	Square edge board
Nominal sizes	86 × 19 mm, 135 × 19 mm, 135 × 35 mm and 140 × 35 mm decking
Selling unit	Per linear metre (LM), random lengths; preferred lengths by quote





02 Product overview

Our Redgum is Forest Red Gum (*Eucalyptus tereticornis*), sold in the market as QLD Reds. We state the species exactly so you know precisely what you are buying. It is a dense, durable and highly versatile Australian hardwood with supplier-published Class 1 above-ground durability and a 40+ year service expectation.

The warm mid-to-deep red-brown colour deepens with age and weathering, which is why this species is chosen when the timber's tone is the feature of the deck.



03 Profile and dimensions

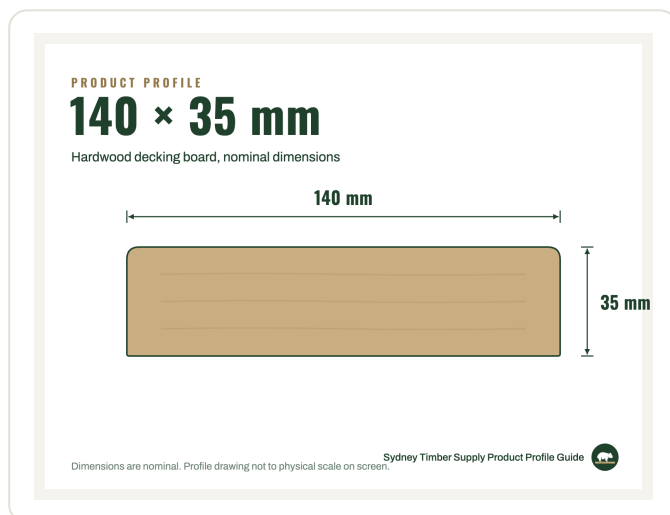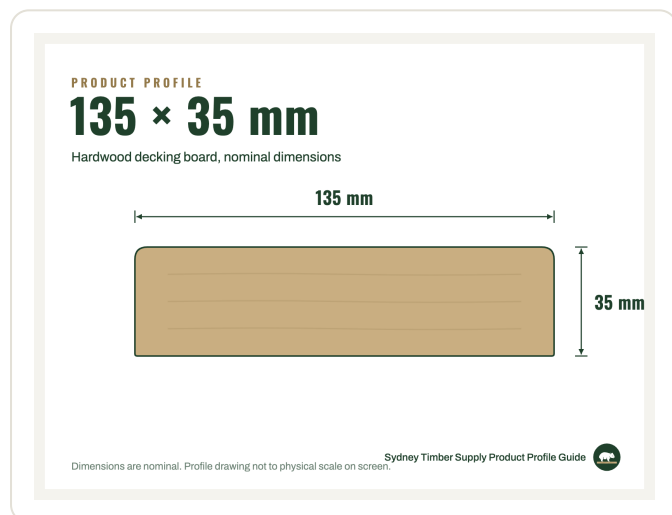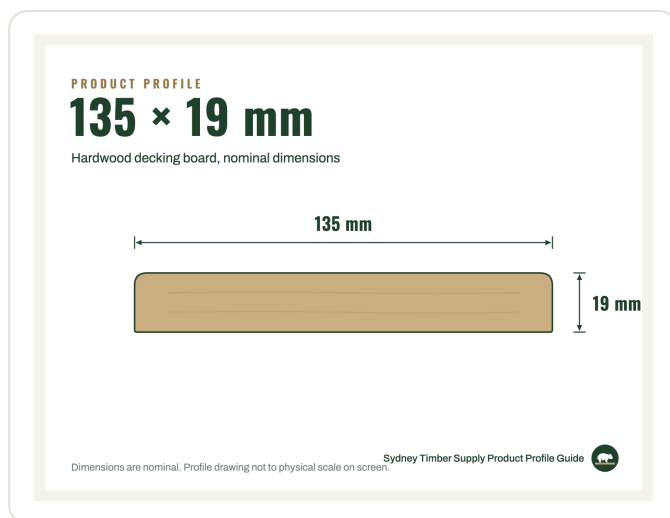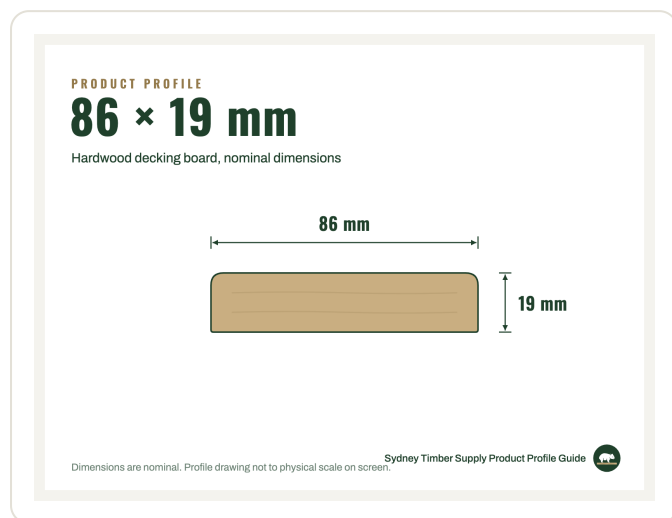

04 Ordering

Pricing

Priced per linear metre (LM). The current rate is shown on the product page; quantities are entered as linear metres.

Lengths

Random lengths are supplied. Preferred individual lengths can be requested by quote and are confirmed against current supplier availability.

Packs and trade

Pack quantities, set-length packs where published, and trade volumes are quoted. Use the quote form on the product page or call us.

Pickup and delivery

Pickup from West Gosford NSW. Delivery is quoted per order based on load size, board length and site access.



05 Installation and handling

- Store boards flat, fully supported and off the ground, and keep them dry before installation. Allow the timber to acclimatise at the site before fixing.
- Fix with hot dipped galvanised or stainless steel screws, two per joist, pre-drilled and countersunk. Stainless steel fixings are recommended for coastal or poolside work.
- Maintain ventilation gaps between boards and adequate ground clearance so the deck can dry out; the supplier installation guidelines on the product page set out clearances in detail.
- Use sharp, quality cutting tools and seal cut ends with decking oil. Wear appropriate eye, ear and breathing protection when cutting.

06 Care and maintenance

- Clean the surface before coating; an oxalic acid based timber cleaner removes dirt, grease and tannin stains.
- Finish with a penetrating decking oil per the coating manufacturer's label, then re-coat on a regular cycle suited to exposure and traffic.
- Monitor the coated timber for colour loss and dryness, and re-coat when it begins to look dry to maintain protection.

07 Source and disclaimer

Technical information has been compiled from Stagwood supplier documentation provided to Sydney Timber Supply. Product availability, colour and individual board characteristics may vary. This sheet is general product information, not a structural certification; confirm critical requirements at order stage.